

DUCHESNE COUNTY MONUMENT SURVEY RECORD

T1S R3W


SEC 35 | SEC 36

SEC 2 | SEC 1


T2S

U.S.B.&M.

A-21



Z-21

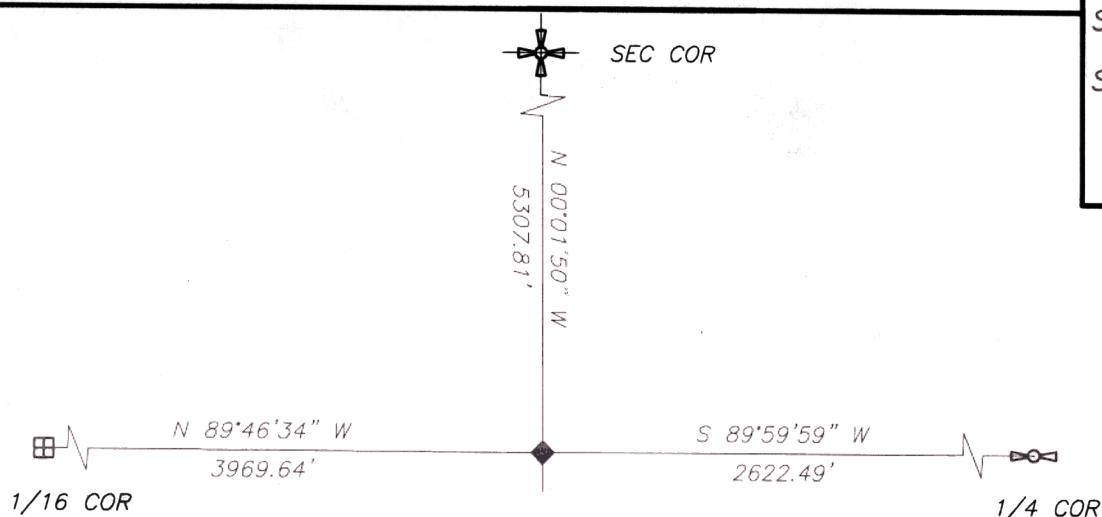

SCALE; 1"=30'



NOTE:

THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT (1/4 CORNER) LOCATED AT LAT. 40°23'18.204"N AND LONG. 110°10'15.865"W USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK MAINTAINED AND OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND BLM ALUMINUM CAP

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

TIED MONUMENT INTO VRS CONTROL NETWORK

STATE PLANE COORDINATE DATA
(U.S. SURVEY FEET)

NAD 83 UTAH CENTRAL ZONE

N:7297055.390

E:2008194.563

LATITUDE: 40°20'41.474" N

LONGITUDE: 110°10'49.733" W


PUBLIC LAND SURVEY SYSTEM GCDB ID NO. 600100

CERTIFICATION

I, Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 28 Aug '09

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

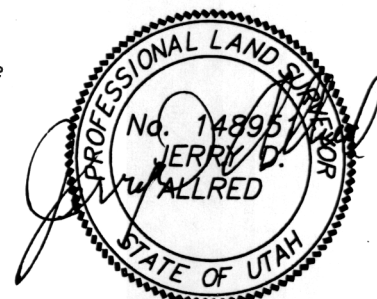

SCANNED

2005